# **B750-SR**

## **Floor Spring**



#### Product Features


- · Adjustable power size conforms to EN3-6
- · Adjustable closing & latching speed
- · Mechanical backcheck
- Maximum door opening angle 180° for single & double action applications
- Mechanical hold-open at 90° (optional upon request)
- · Factory tested 500,000 cycles

Power size	3	4	5	6
Max. Door width (mm)	950	1100	1250	1400
Max. Door weight (kg)	300			

- ★ According to EN1154 testing regulation, the door weight over 120kg may not fully comply with EN1154 standard.
- ★ Suggest to reduce Max door weight 20% for considering offset arm application.

#### Accessories

- · Standard arm
- · Pivot
- · Alternative spindle options
- · Offset arm

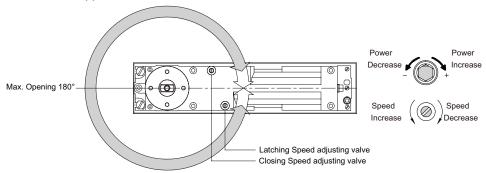

# Application Ranges

- · Available for single & double action door
- · Available for light, medium & heavy duty door
- $\cdot$  Closer body adjustable in cement box for

Length (mm): 4 Width (mm): 2 Height (mm): NA

#### Finishes

 Painted – silver black & other colors upon request & discussion

### Dimensions

